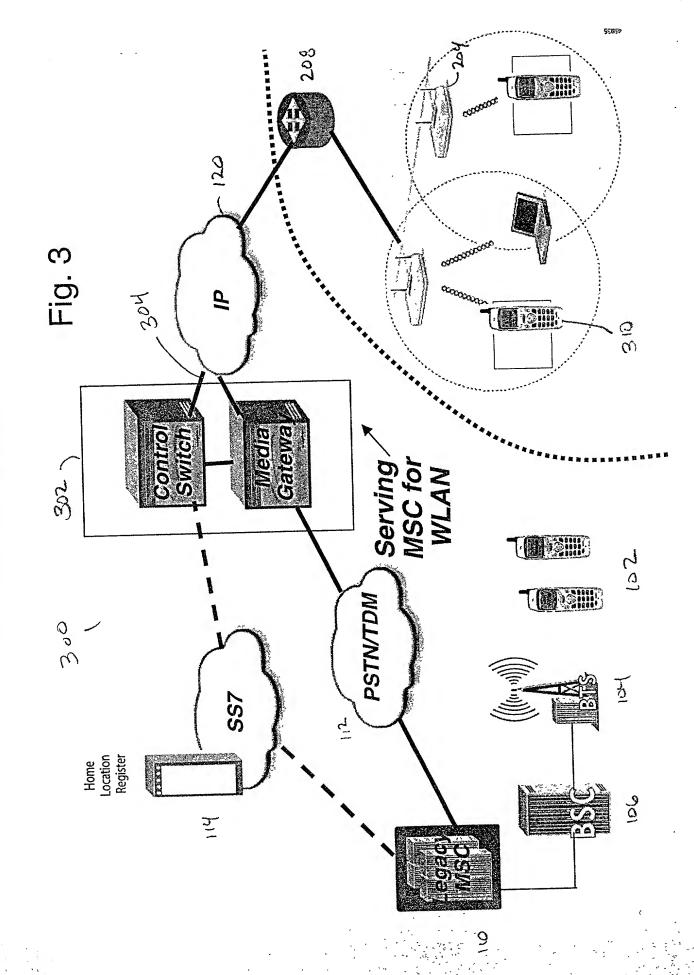
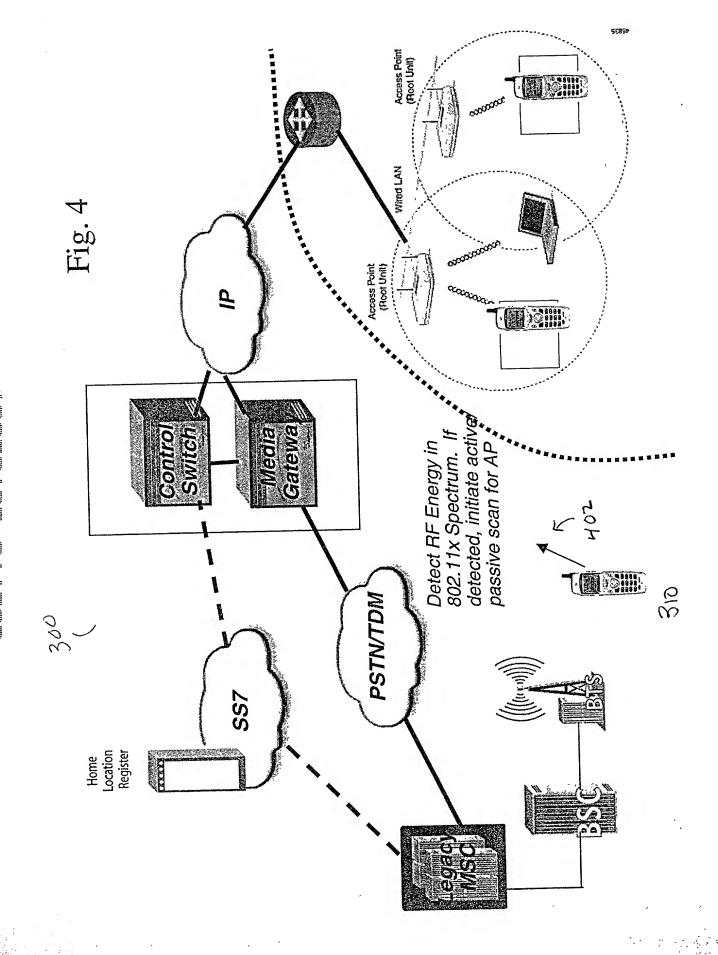


2000





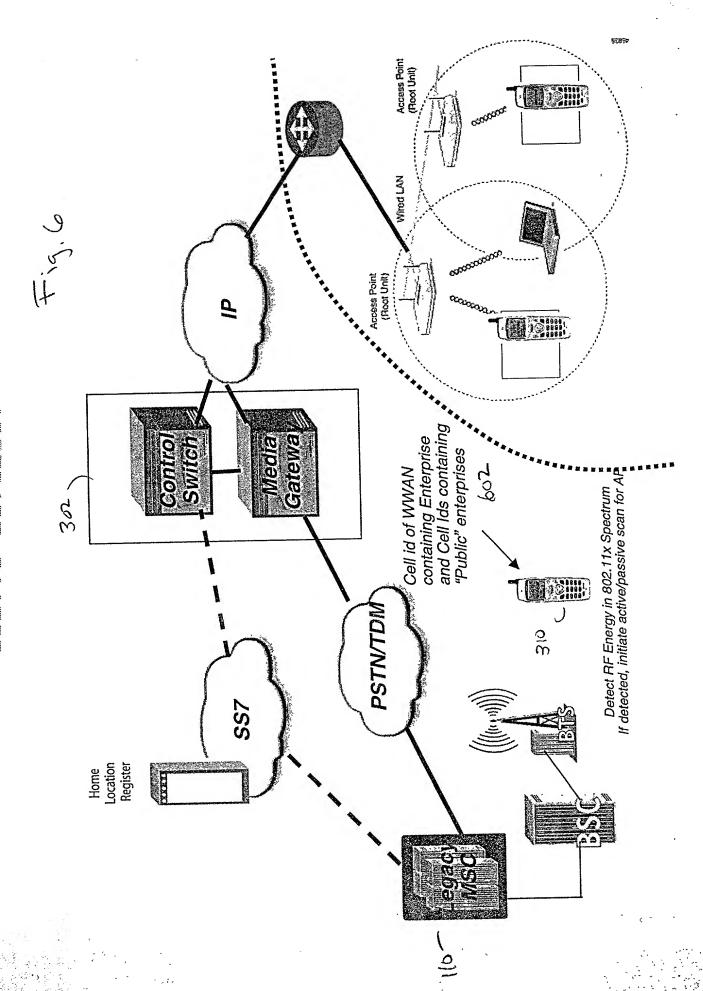


Figure 7

CDMA


Multi-mode Phone

+ WLAN modem

IS95/CDMA2000

+ VoIP (SIP/RTP/UDP/IP)

Mobility via Preferred Embodiment Client



GSM/UMTS

Multi-mode Phone

GSM/UMTS

WLAN modem

VoIP (SIP/RTP/UDP/IP)

Mobility via Preferred Embodiment Client

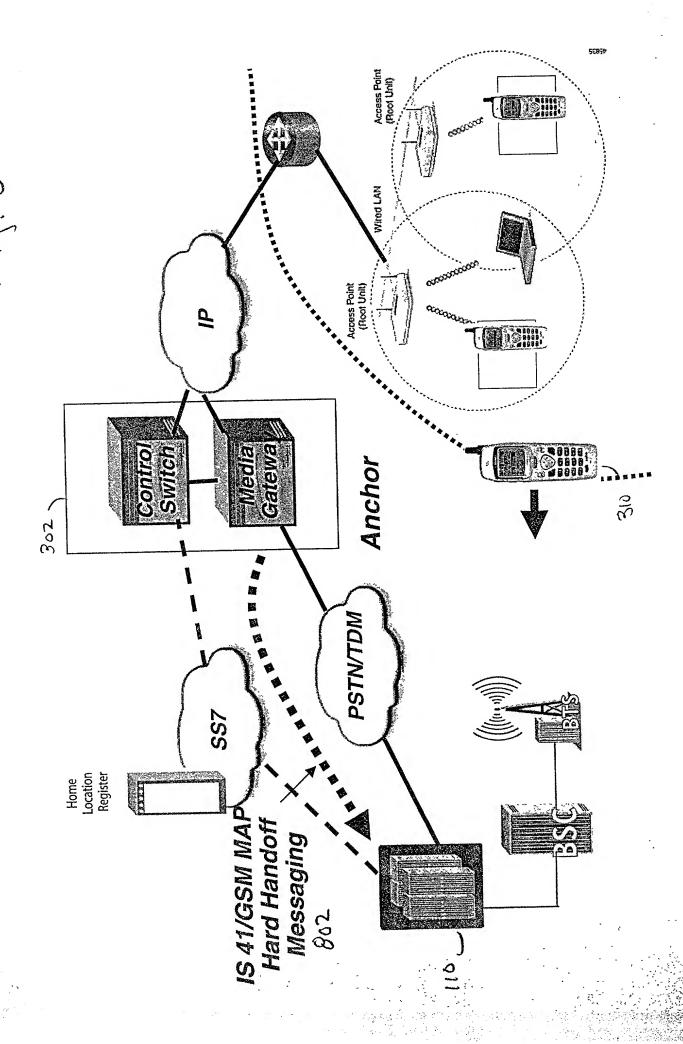


Fig. 9

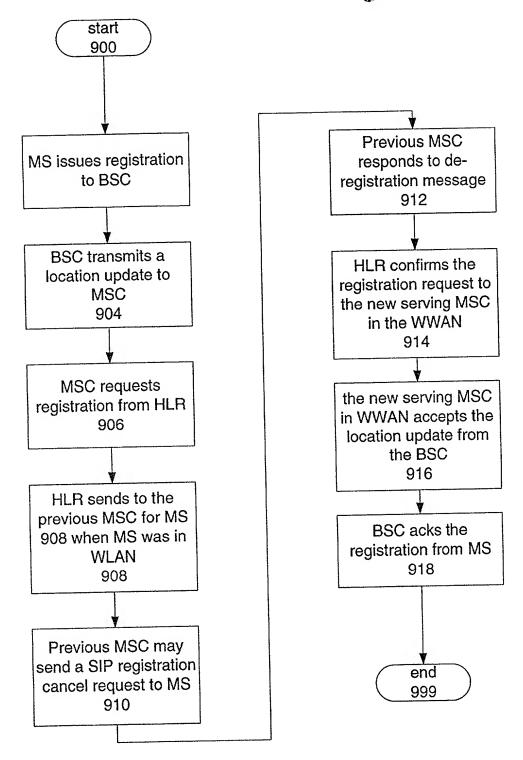


Figure 10

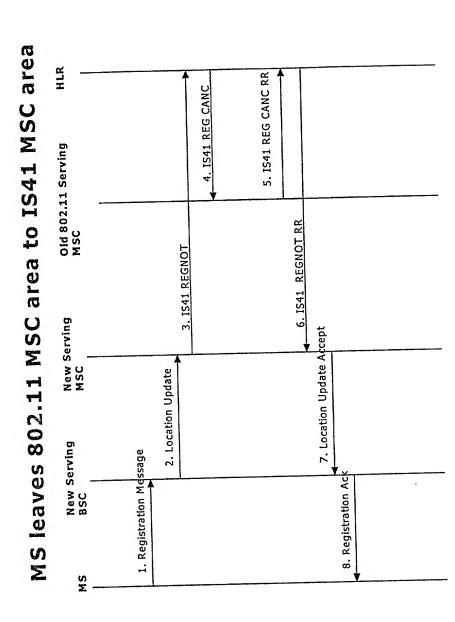
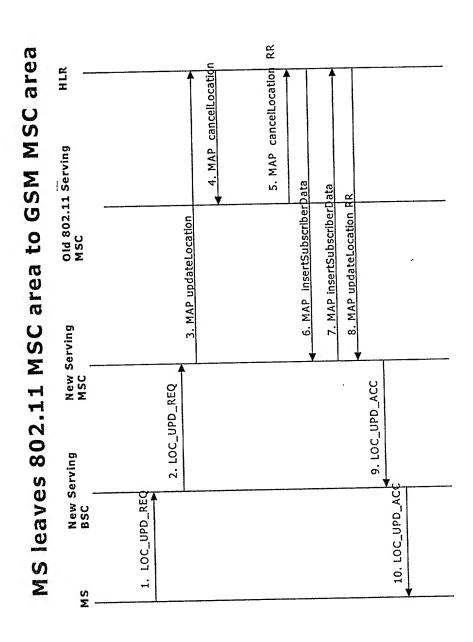


Figure 11



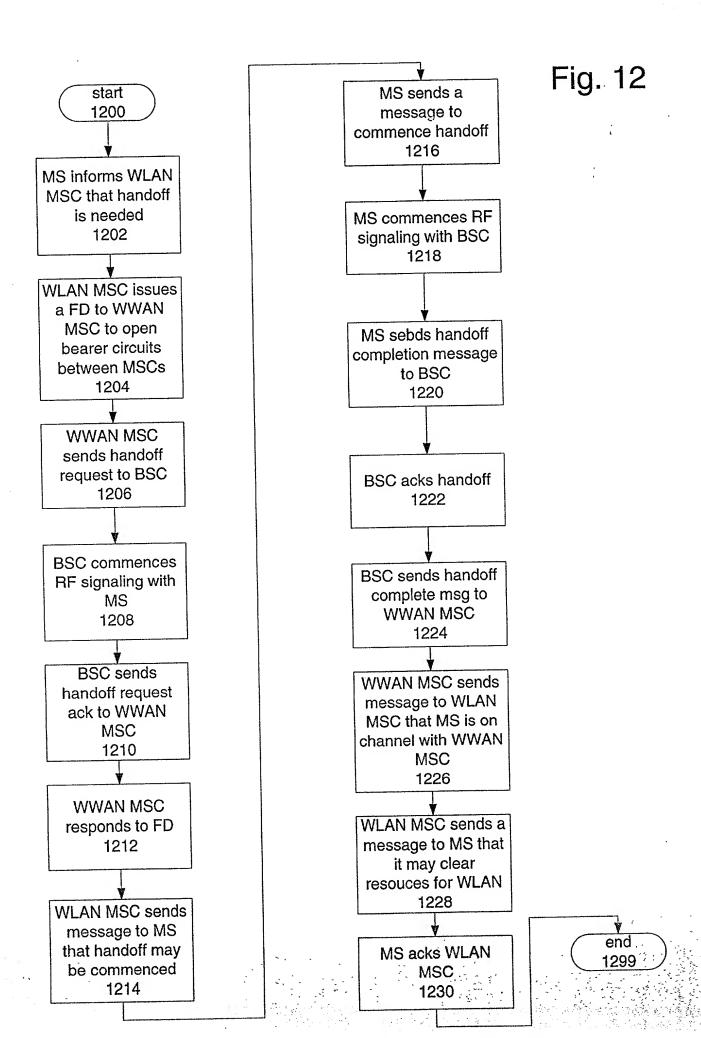


Figure 13

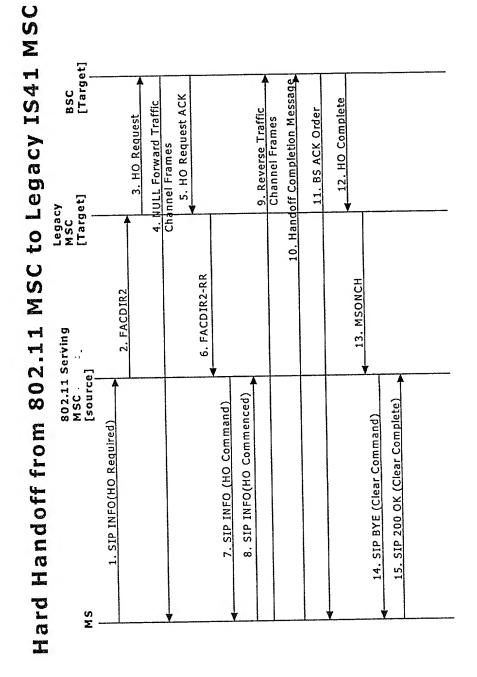
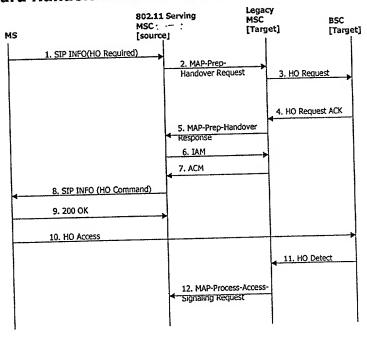
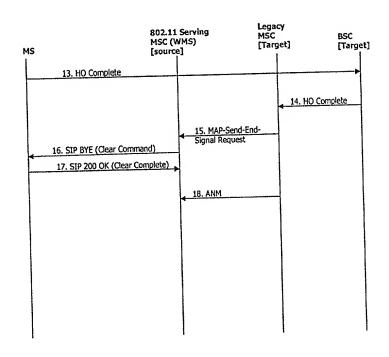
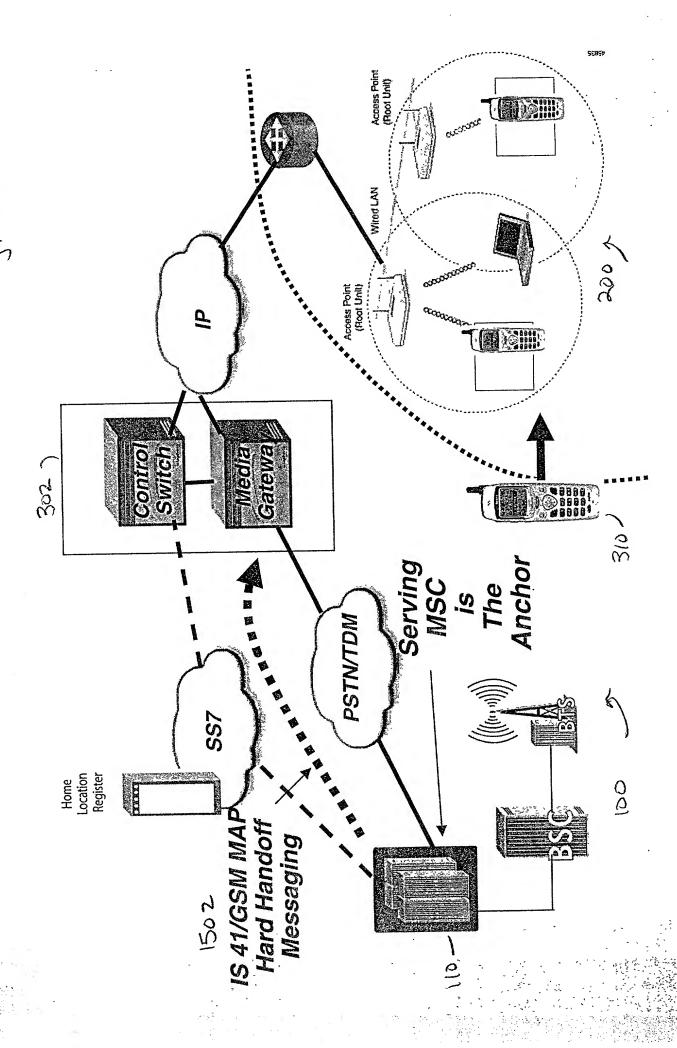


Figure 14

Hard Handoff from 802.11 MSC to Legacy GSM MSC







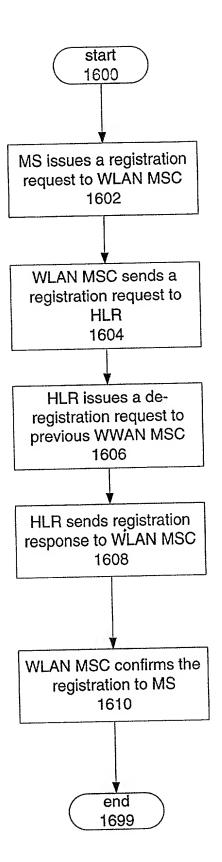


Fig. 16

Figure 17

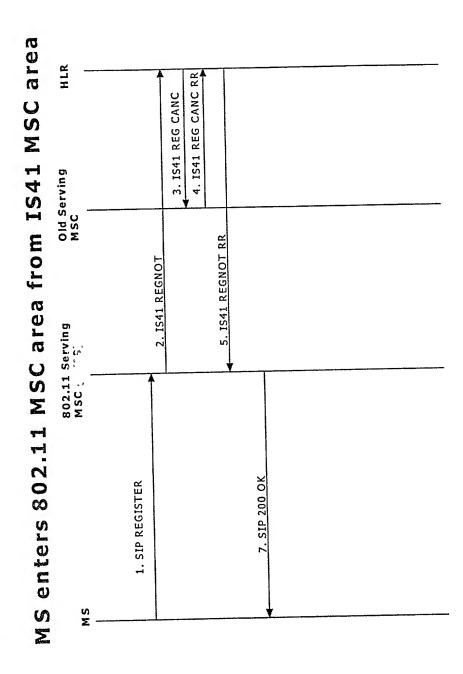
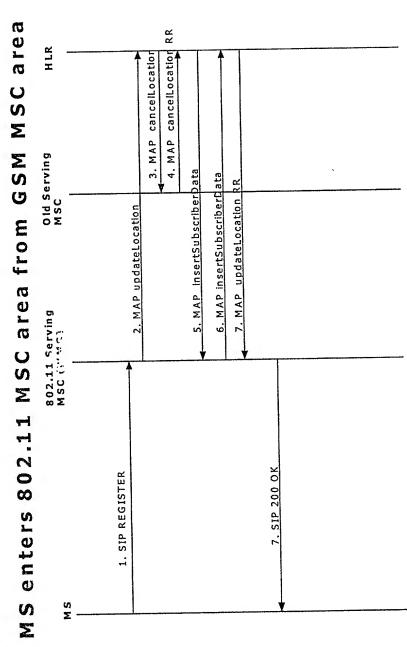


Figure 18



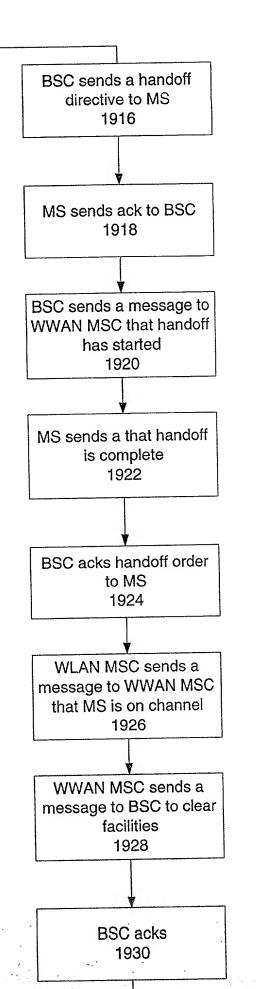


Fig. 19

end 1999

Figure 20

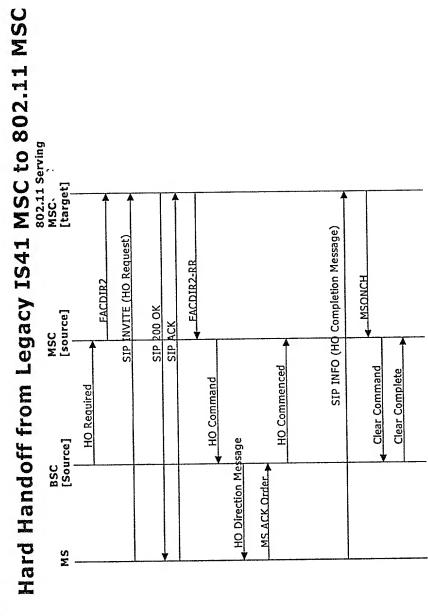


Figure 21

5. MAP-Prep-Handover Response 3. SIP INVITE (HO Request) 2. MAP-Prep-Handover Request 10. MAP-Send-End-Signal Request 9. SIP HO Completion Message 4. 200 OK Z. ACM 6. IAM 11. Clear Command 12. Clear Complete 8. HO Command 1. HO Required

Figure 22



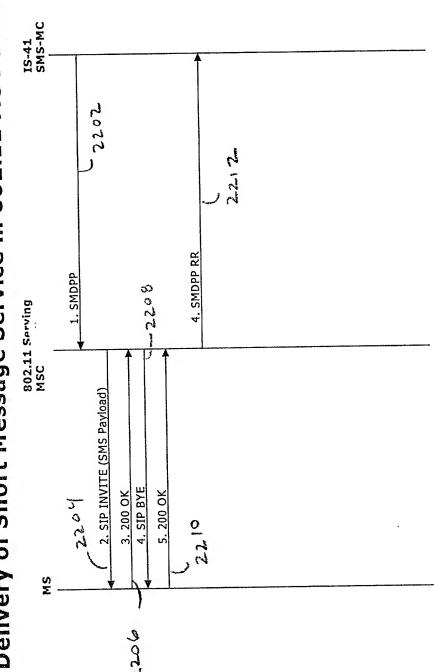


Figure 23

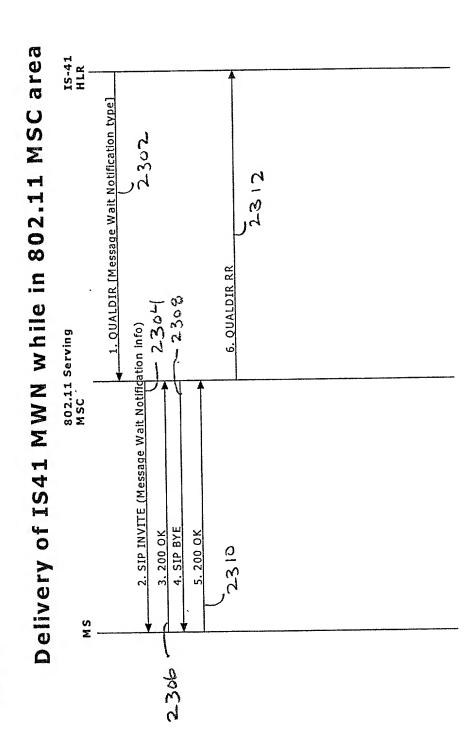


Figure 24

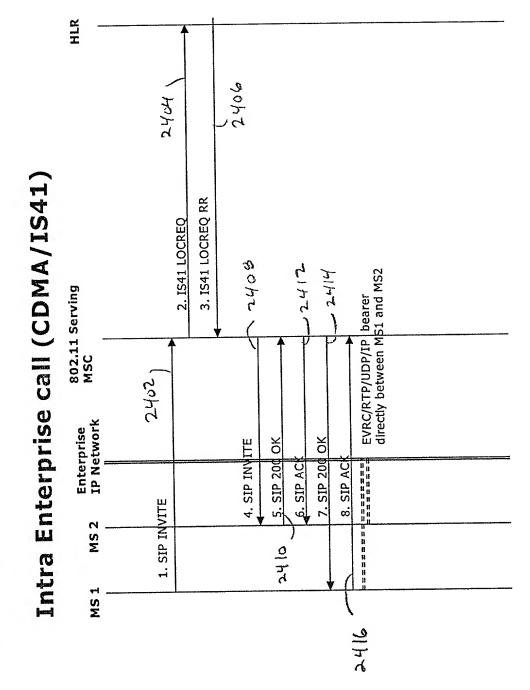


Figure 25

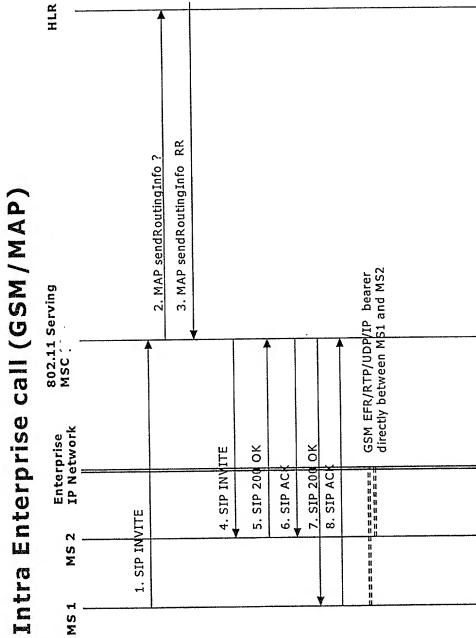


Figure 26

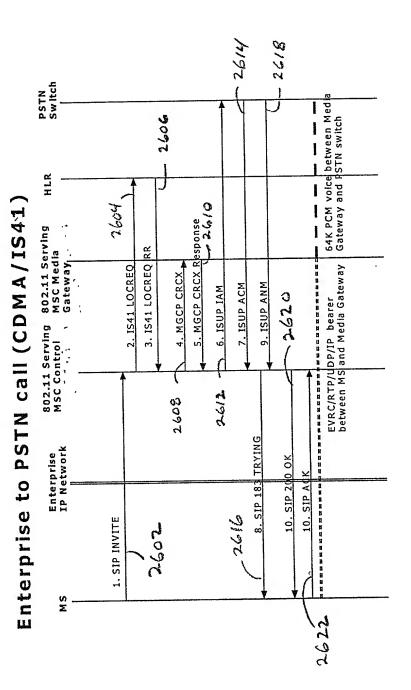


Figure 27

Enterprise to PSTN call (GSM/MAP)

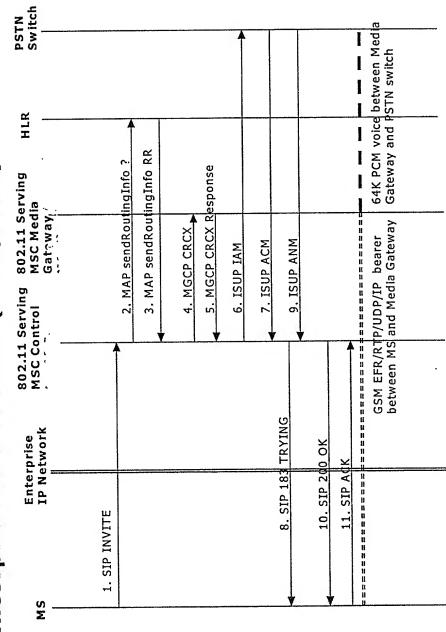


Figure 28

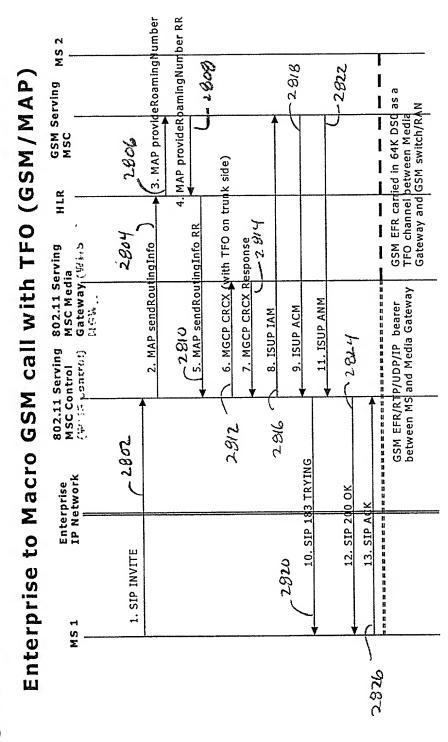


Figure 29

